


4

2

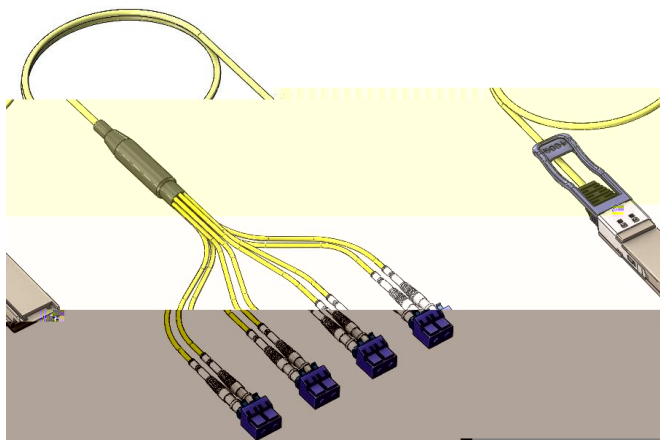

	100G QSFP28 PSM4	500	4
	25G	4	1310
DFB	4	PIN	8
	LC	QSFP+	

- 1310 DFB
- 25.8G
- 4 /
-
- 3.5
- 0-70
- R HS6

- 100G
-

- QSFP28:SFF-8665,SFF-8679, SFF-8636
- IEEE802.3
- 100G PSM4 S R .2.0

Parameter	Symbol	Unit	Value		
			Min	Typ	Max

S	E	D	I	S	V_{IN}	V -	350		800
T	D	V			V_{DIS}	V	2		3.5
T	E	V			V_{EN}	V	-0.3		0.8
T	F	A	V		V_{FA}	V	2		3.5
T	F	D -A	V		V_{FDA}	V	-0.3		0.8
R									
S	E	D	O	S	V_{OD}	V -	185		900
LOS F					V_{LOSFT}	V	2		3.5
LOS N					V_{LOSNR}	V	-0.3		0.8