


+Tap      +WDM

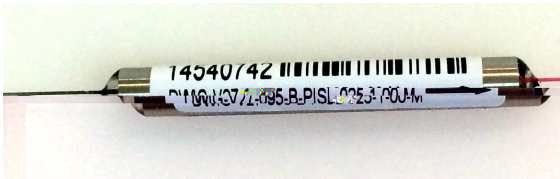

- 
- 
- 
- 
- 

- Telcordia GR-1221-CORE
- RoHS

|                             |                    | nm | 980/1550  |      |
|-----------------------------|--------------------|----|-----------|------|
| (λs)                        |                    | nm | 1528~1569 |      |
| (λp)                        |                    | nm | 965~990   |      |
|                             |                    | dB | ≤1.5      | ≤1.6 |
|                             |                    | dB | ≤0.8      | ≤0.8 |
| Peak to Peak Error Function |                    | dB | ≤0.6      |      |
|                             | Signal to Com@λs   | dB | ≥21       | ≥36  |
|                             | Com to Signal@λp   | dB | ≥20       |      |
|                             | Pump1 to Com@λs    | dB | ≥18       |      |
|                             | Pump2 to Signal@λs | dB | ≥50       |      |

|  |    |                               |
|--|----|-------------------------------|
|  | dB | ≥45                           |
|  | dB | ≤0.2                          |
|  | ps | ≤0.05(Low PMD), ≤0.10(Normal) |
|  | dB | ≥50                           |
|  | mw | ≤300                          |
|  |    | -5~+70                        |
|  |    | -40~+85                       |
|  | mm | Φ3.5*29                       |
|  |    | OFS980-16                     |

DWIG- □-□-□-□-□-□-□-**M**

Connectors: FC/UPC,SC/UPC,LC/UPC,00:No Connector

Fiber Length:1 1.0m; customer specify

Fiber Dia.:09     $\Phi 0.9\text{mm}$     0-k'