

100G QSFP28 For SR4/ESR4 Transceiver

100

DESCRIPTION

- 2 . 2 /
- 300
- 0
- 1 12
- +3.3
- 2
- 1
- 0 + 0
-


- 100 - /

- - 3 (2.)
- 02.3 201
- - (1.), - 1(2.3) - (1.)

SPECIFICATION

Recommended Operating Conditions

		0		+ 0	
		3.13	3.3	3.	
,			2 . 12		
		2			
		0		0.	
. 2				300	

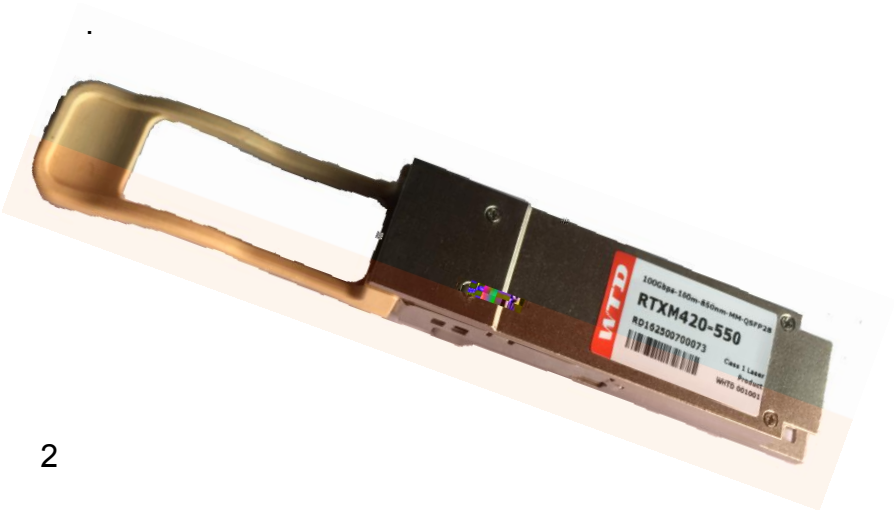

100G QSFP28 For SR4/ESR4 Transceiver

Electrical Specification

		1.2		2.0	
				0.	
-				2000	

Electrical Specification – Transmitter (EACH LANE)

-		-0.3			
		1			
		1 0		00	
		0	100	110	

Electrical Specification – Receiver (each Lane)

-				0.2	
				.	
		3 0		0	
		0	100	110	

1. Power - on Initialization Time is the time from when the power supply voltages reach and remain above the minimum recommended operating supply voltages to the time when the module is fully functional.
2. The single ended input voltage

100G QSFP28 For SR4/ESR4 Transceiver

Ordering Information

				()		()	()	()	()
20-0	2	*2	0	- 2.		- .	0 0	100	2
20-1	2	*2	0	- 2.		- .	0 0	300	2
20-2	2	*2	0	- 2.		- .	0 0	100	2
20-3	2	*2	0	- 2.		- .	0 0	300	2