


P a F b S c M

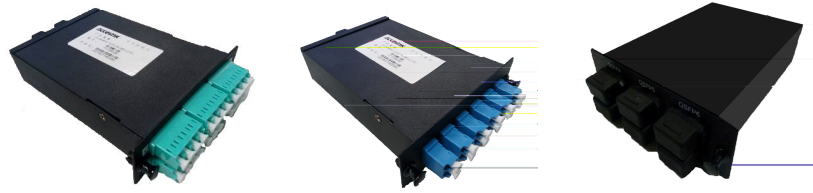

I
M /M O M 8,12,24 . A
LC, C,FC, M /M O
ODF
(MDA) (EDA)

- F
- - - -
 - M , , -
 - F
 - E M O-LC 12 24
 - A , OM1, OM2, OM3,
OM4, G652D, G657A1 G657A2

- A
- 1 /4
 - C M O LC
 - N

- IA/EIA-568-C.3
- IEC 61754-7
- IEC 61754-20
- G -1435-CO E
- G -326-CO E

Connector Type	Insertion Loss(Average)	Insertion Loss(Max)	Return Loss	Unit
MPO(MM)	0.10	0.30	25	B