

PDLC




PDLC

-
-
-
- LC
 - $\Phi 4.8\text{mm}$, $\Phi 7.0\text{mm}$
 -
 -
 -
 -
-
-
-
-
- YD/T 1272.1-2003
- IEC 61754-20 2012

		LC2/UPC	
		dB	≤ 0.3
		dB	≤ 0.2
		dB	$\geq 55\text{dB}$
		dB	NA
		Times	500
			-25~70
			-40~85

M□-□/□-□/□-□-□-□

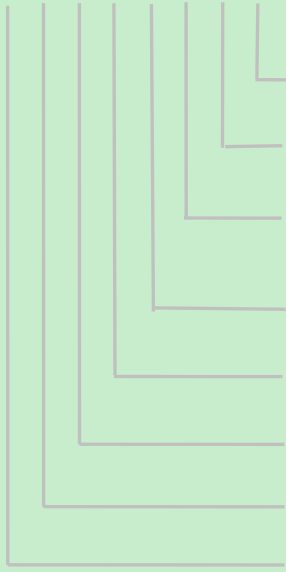

1:1m,

/ 48: Φ4.8mm,70: Φ7.0mm

S:G.652, A2:G.657A2, B:G657B, M: (50/125), D:
(62.5/125),OM3,OM4

UPC, 0:

LC2,0:

UPC

LC2

2: